



NOVA N-4080i

On-Counter Presentation Area Imager Bar Code Scanner

CHAMPTEK[®]
We value your ID's

Introduction

The NOVA N-4080i is an omni-directional presentation area imager bar code scanner, it uses digital imaging technology to provide intuitive and blazing reading of 1D and 2D bar codes without sacrificing scanning quality or performance. The N-4080i reader provides great performance and reliability along with a rich feature set to provide excellent value in virtually any desktop presentation barcode scanning system. With the N-4080i, not only can identify product pricing barcode label, furthermore, it is able to scan virtually mobile bar code on various types of display to enhance service levels.

When space is limited but high performance is required, its compact size and footprint make it the ideal solution for space-constrained environments. Its precise imaging scan volume is perfect for hands-free scanning in confined spaces and helps reduce accidental misreads of items, improving productivity and customer satisfaction.


The N-4080i reader includes a powerful configuration tool which allows easy integration into existing or new host systems, allows easy integration into existing or new host systems, allows management to manage maintenance.

Features

- Read the most common 1D, 2D, composite and stacked codes, reduce your investment cost.
- Boost customer services with good ability to scan virtually mobile bar code on various types of display.
- With the most compact footprint can fit in the most space constrained areas.
- Best cost-effective investment.
- With internal RF antenna which could connect with EAS deactivation system for deactivation purpose.

NOVA N-4080i

Reading Range

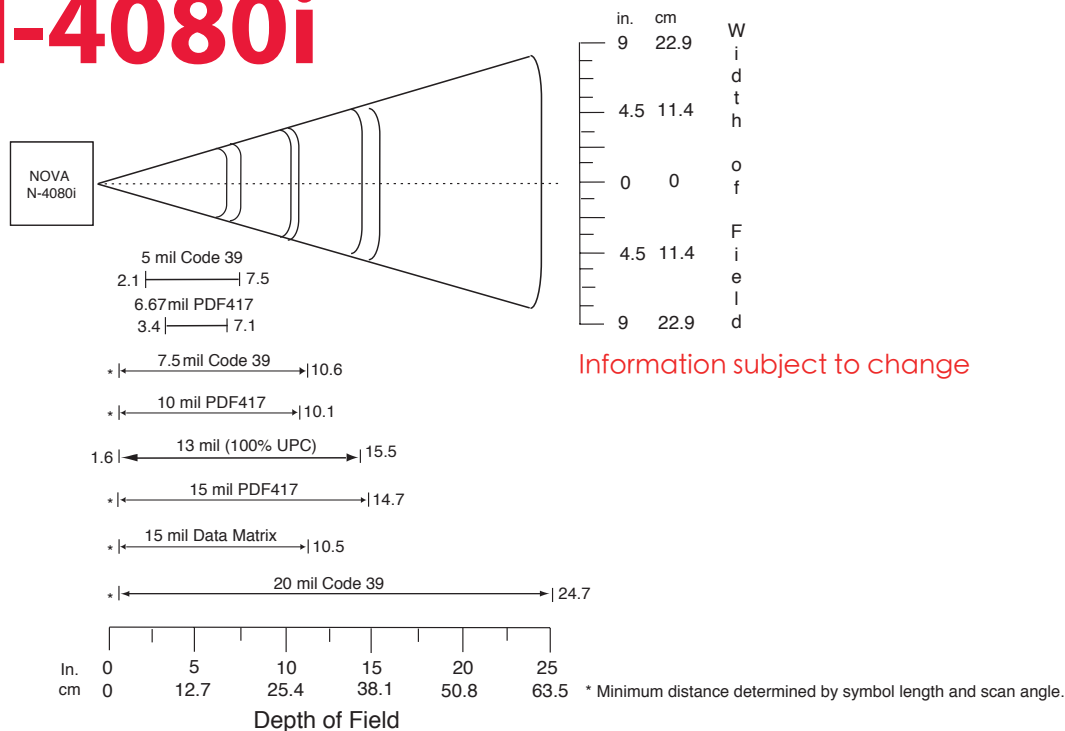

Specifications

Physical Characteristics

Body Weight	Approx. 572g
Dimension	Scanner: 152.07mm(W) x 152.02mm(H) x 90.22mm(L)
Cable Length	USB (300cm); RS232 (300cm)
Material	PC + ABS
Connector	RJ48

Performance

Light Source	Visible red light 625nm LED
Scan Speed	120 scans per second in 1D mode 60 images per second in 2D mode
Resolution	752(H) x 480(V) pixels
View of Field	40° Horizontal, 25° Vertical
Forward & Backward (Pitch)	±60° (from front to back)
Left & Right (Skew)	±60° (from plane parallel symbol (side-to-side))
Rotational Tolerance	±180°
Interface	RS-232, USB (Virtual Com.)
Indicators	Orange=good read

Electrical Characteristics

Interface	RS232	USB(Virtual Com.)
Supply Voltage	DC Adaptor DC+5V 5%	USB Power
Stand by (Typ.)	230 mA	230 mA
Operation (Typ.)	460 mA	460 mA

Environmental

Operating Temp.	0°C to 50°C
Storage Temp.	-20°C to 70°C
Relative Humidity	20% to 95% (Non-condensing)
Ambient Light	100,000 Lux Max. (Sunlight)

Reliability

Life Time	
MTBF (Calculated)50	50,000 hours
Cable Bending Test	25,000 times minimum (30 times/min @ 500g/90°)
Drop	39.38 inches (100 cm) drop on concrete surface

Readable Symbologies

1D Symbologies
EAN/UPC,UCC/EAN128, ISBN, ISBT, Code 11, Code 39, Code 93/93i,
Code 128, Interleaved, Matrix, Industrial, Standard 2 of 5, Codabar,
MSI, Plessey, Telepen, Postal codes, GS1 DataBar

2D Symbologies
Data Matrix, Data Matrix Inverse, PDF417, Micro PDF 417, Maxicode,
QR code, QR code Inverse, Aztec (& Inverse), EAN. UCC composite,
MicroQR code

CE, FCC and RoHs compliant

Due to Champtek's / Scantech ID's continuing product improvement programs, specifications and features are subject to change without notice.